Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Thebo

Supplier's address: -

Model identifier: P-LED 89 / 2,8 W Möbeleinbauleuchte

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	12V/DC PCB bestückt mit 36 Stcl LED Chips 3014		
Mains or non-mains:	-	Connected light source (CLS):	Nein
Colour-tuneable light source:	Nein	Envelope:	-
High luminance light source:	Nein		
Anti-glare shield:	Ja	Dimmable:	No
Product parameters			
Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	285 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 389
On-mode power (P_{on}), expressed in W	2,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	87

Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	12	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	70		
	Depth	70		
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,408 0,386
Parameters for LED and OLED light sources:				
R9 colour rendering index value		0	Survival factor	0,95
the lumen maintenance factor		0,90		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

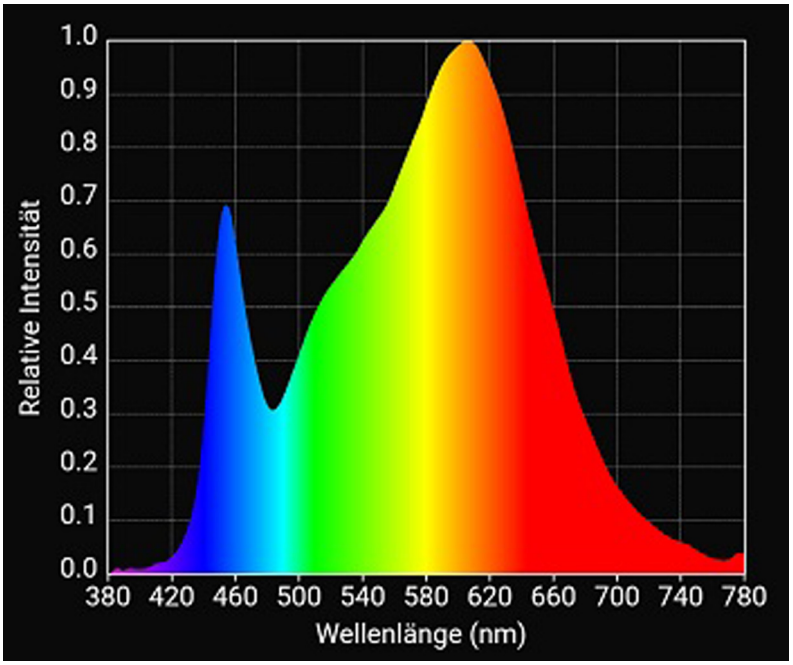
Relative Intensität
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
380 420 460 500 540 580 620 660 700 740 780
Wellenlänge (nm)